



iS6059 SPI

Excellent technology for solder and sinter paste inspection


High-Throughput Paste Inspection with Maximum Accuracy




Color-assisted 3D solder paste volume calculation



Paste bridge after soldering



3D solder paste volume calculation with grid pattern



User-friendly overviews in vVision

Extremely high throughput due to FastFlow handling

Enhanced quality and speed of inspection

Four angled views for shadow-free inspection images

High reproducibility

Very easy operation: color images for verification and efficient program generation

Customer hotline and website, remote maintenance


The iS6059 SPI is a 3D SPI system that offers unbeatable advantages for economical SMT production. Key features include an inspection speed of 90 cm²/s and a field of view size of 58 mm by 58 mm. The orthogonal optical resolution is 12 µm and is combined with four angled views to deliver perfect, shadow-free inspection results – which are key for very small inspection areas. Viscom's optional FastFlow handling offers extremely high throughput rates. Assemblies are synchronously infed and outfed at high speed.

This system, configured to meet optimum cost/benefit aspects, is based on the unique and proven XM camera technology from Viscom and combines precise defect detection with the highest inspection speed. The iS6059 SPI inspects all quality criteria for solder paste deposits, including volume, shape, surface, height, offset, paste bridges and paste smearing.


Evaluating the 3D measurement data and linking the results via Quality Uplink with the paste printer, placement system, AOI and AXI allows for effective process control and sustainable quality improvement. In this way, Viscom's 3D SPI system delivers indications of process weaknesses that can be automatically adapted, e.g. adjusting the screen cleaning cycles or correcting print displacement or placement offset.



Technical Specifications iS6059 SPI

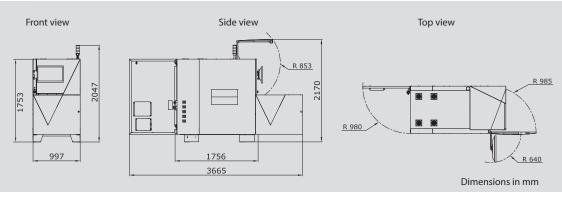

		iS6059 SPI
Inspection scope		Solder paste deposits (stencil printing or dispensing technology, up to pad sizes for 01005 components); sinter paste, adhesives, surface, height, print displacement, smearing, shape, coplanarity, open area analysis, OCR, DMC
Camera technology		XM-SPI-II
	3D sensor technology	
		01
	Z-resolution Z-range	0.1 μm Up to 5 mm (0.2")
	Z-range	op to 3 min (0.2)
	Angled view cameras	
	Number of megapixel cameras	4
	Orthogonal camera	
	Resolution	13.um
	Field of view	12 μm 58 mm x 58 mm (2.3" x 2.3")
	Tield Ci Tiell	
Inspection speed		Up to 90 cm ² /s
Software	User interface	Viscom vVision/SI EasyPro
	Statistical process control	Viscom vSPC/SPC, open interface (optional)
	Verification station	Viscom vVerify/HARAN
	Remote diagnosis	Viscom SRC (optional)
	Programming station	Viscom PST34 (optional)
c .		
System computer	Operating system	Windows®
	Processor	Intel®Core™i7
PCB handling	PCB dimensions	508 mm x 508 mm (20" x 20"); long-board option available
	PCB support	Optional
	Transport height	850 - 950 mm ± 20 mm (33.5" - 37.4" ± 0.8")
	Width adjustment	Automatic
	Transport concept	Single-track transport system; dual-lane option available
	PCB clamping	Pneumatic
	Upper transport clearance	50 mm (2")
	Lower transport clearance	50 mm (2")
Other system data	Positioning unit	Synchronous linear motor
	Interfaces	SMEMA, Hermes, CFX, third-party providers
	Power requirements	400 V, 50 Hz, 3P/N/PE +/- 10%; 4 - 6 bar working pressure
	System dimensions	997 mm x 1756 mm x 1753 mm (39.3" x 69.1" x 69") (W x D x H)
	Weight	Approx. 1060 kg (2337 lbs)

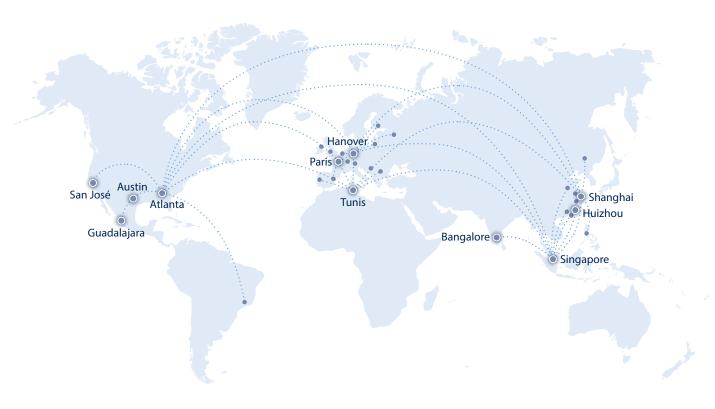

Headquarters:

Viscom SE

Carl-Buderus-Str. 9-15 30455 Hanover Germany Phone: +49 511 94996-0

Email: info@viscom.de

Europe

Viscom France S.A.R.L.

6, rue Saint Simon Zone du Vert Galant 95310 Saint-Ouen l'Aumône France

Phone: +33 134 641616 Email: info@viscom.fr

Africa

Viscom Tunisie S.A.R.L.

Rahma Building; App B5, Block B, 2nd floor Lac Houran Street - Berges du Lac 1053 Tunis, Tunisia Phone: +216 71960584 Email: info@viscom.fr

Americas

Viscom Inc.

1775 Breckinridge Parkway Suite 500, Duluth (Atlanta) GA 30096, USA Phone: +1 678 966-9835

Email: info@viscomusa.com

Viscom Inc.

898 B Faulstich Court San José, CA 95112, USA Phone: +1 818 4160514 Email: info@viscomusa.com

Viscom Inc.

9600 Great Hills Trail Suite 150 W, Unit# 144 Austin, TX 78759, USA Phone: +1 737 280-5759 Email: info@viscomusa.com

Viscom Inc.

Av. Vallarta 6503 Concentro Local F-27 Zapopan (Guadalajara) JAL. C.P. 45010, Mexico Phone: +52 333110-1567 Email: info@viscomusa.com

Asia

Viscom Machine Vision Pte. Ltd.

150 Kampong Ampat/ #01-02 KA Centre 368324 Singapore Singapore

Phone: +65 62859-891 Email: info@viscom.com.sq

Viscom Machine Vision Trading Co. Ltd.

2nd floor, Block D No. 1010 Kaixuan Road 200052 Shanghai, China Phone: +86 21 61619368 Email: info@viscom.cn

VICN Automated Inspection Technology (Huizhou) Co. Ltd.

2nd Hechang Road No. 25 Zhongkai High-tech Zone 516006 Huizhou City Guangdong province, China Phone: +86 752 2607785 Email: info@viscom.cn

Viscom Machine Vision (India) Pvt. Ltd.

No. 2, Katha, No. 279/283 Hulimangala Village Jigani Hobli, Anekal Taluk Bangalore 560105, India Phone: +91 9481202030 Email: info@viscom.com.sq

www.viscom.com





